


POLYTOP

Exporter from china

PTNZ25X BENCH DRILLING MACHINE

Features:

- ▣ 3- phase with two-voltage collocation
- ▣ Gear shift
- ▣ Superior quality of gears with hardened and lapped gears of surface
- ▣ The model of machines with A is electromagnetism clutch transmission feed, with B is mechanical feed, without A and B is manual feed.

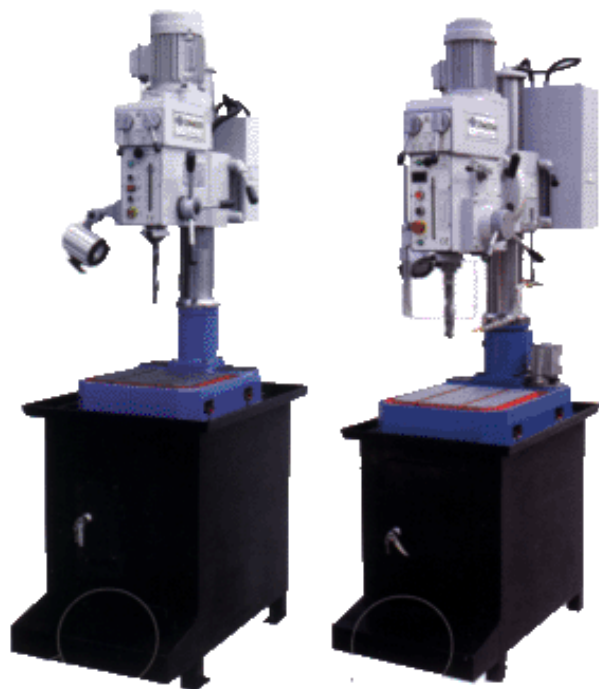

Fender

Special accessory



Depth gauge and tachometer



Model	PTNZ25X	PTNZ30X/30BX	PTNZ35X/35AX/35BX
Max. drilling diameter. (steel) and tapping diameter	∅25/M16mm	∅30/M20mm	∅35/M22mm
Max. travel of spindle	110 mm	135 mm	160 mm
Max. distance from spindle to generating line of column	240 mm	260 mm	320 mm
Max. distance from spindle nose to surface of base worktable	650 mm	700 mm	645 mm
Max. travel of spindle box	500 mm	520 mm	515 mm
Swivel angle of spindle box	-	-	∠45°
Spindle taper bore	MT3	MT3	MT4
Spindle speed steps	6	12	12
Spindle speed range	125~2825 r/min	125~3030 r/min	125~3030 r/min
Spindle feed steps	-	3 (PTEZN4030B)	3 (PTEZN4035A/4035B)
Spindle feed range (mm/r)	-	0.1~0.3 (PTEZN4030B)	0.1~0.3 (PTEZN4035A/4035B)
Effective working area of worktable	310x320 mm	335x340 mm	400x360 mm
Diameter of column	∅95 mm	∅110 mm	∅120 mm
Power of motor	0.75 kw	0.85/1.1 kw	1/1.2 kw
Machine dimension	700x500x1500 mm	740x420x1610 mm	810x460x1640 mm
Net weight and gross weight	280/310 KG	310/350 KG	340/370 KG
Mode of spindle feed	Manual	Manual / Mechanical	Manual / Electromagnetism / Mechanical
ii	ii	ii	ii