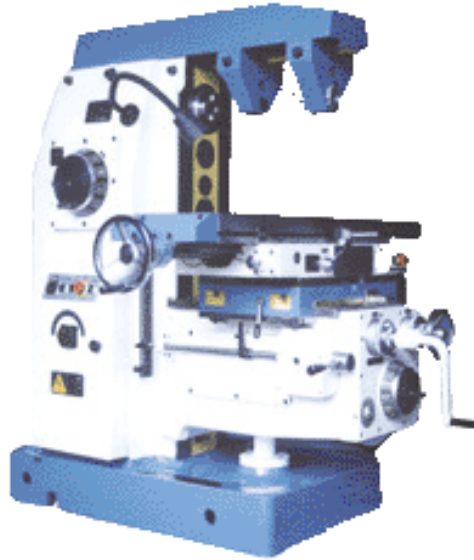


POLYTOP

E x p o r t e r f r o m c h i n a

PTXS6112 UNIVERSAL KNEE-TYPE MILLING MACHINE:

| Main technical Data | PTXS6112 |
|--|-----------------------|
| Table surface | 300;Á1150(1500) mm |
| Number of T-slots and slot width | 3;Á18 mm |
| Distance between T-slots | 70 mm |
| Max. longitudinal travel | 680(780) mm |
| Max. cross travel | 235 mm |
| Max. vertical travel | 400 mm |
| Travel of ram | 470 mm |
| Swivel angle of the milling head | ;Á90;ã |
| Max. rotations angle of table | ;Á45;ã |
| Level spindle taper | 7:24 NO:40 |
| Level spindle Grade of speed | 12 steps |
| Level Spindle Range of speed | 35-1600 rpm |
| Number of feeds | 14 steps |
| Range of feed speeds Longitudinal, cross, Vertical | 4-240 mm/min |
| Speed of rapid travers1e Longitudinal, cross, Vertical | 700 mm/min |
| Main drive motor Level spindle | 4 kw 1440 rpm |
| Feed motor | 0.75 kw 1380 rpm |
| Coolant pump | 40w 2500 rpm |
| Net weight of machine | 2150 kg |
| Gross weight of machine | 2900 kg |
| Overall Dimensions (L;ÁW;ÁH) | 1695;Á1535;Á1630 (mm) |
| ii | ii |