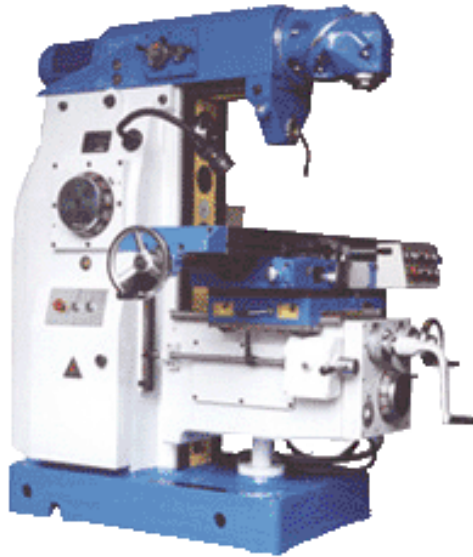


POLYTOP

Exporter from china

PTXS6212A VERTICAL MILLING MACHINE:

Main technical Data	PTXS6212A	PTXS6212
Table surface	300;Á1150(1500) mm	300;Á1150(1500) mm
Number of T-slots and slot width	3;Á18mm	3;Á18mm
Distance between T-slots	70 mm	70 mm
Max. longitudinal travel	680(780) mm	680(780) mm
Max. cross travel	235 mm	235 mm
Max. vertical travel	400 mm	400 mm
Travel of ram	470 mm	470mm
Swivel angle of the milling head	;Á360;ã	;Á360;ã
Max. rotations angle of table	;Á45;ã	;Á45;ã
Level spindle taper	7:24 NO:40	7:24 No:40
milling head spindle taper	7:24 No:40,morse No:3	7:24 No:40,morse No:3
Level spindle Grade of speed	12steps	12 steps
Level Spindle Range of speed	35-1600rpm	35-1600rpn
milling head spindle Grade of speed	stepless	8 steps
milling head spindle Range of speed	70-1500rpm	67-1600rpm
Number of feeds	14steps	14 steps
Range of feed speeds Longitudinal, cross, Vertical	12-720 ;ç4-240 mm/min	12-720 ;ç4-240mm/min
Speed of rapid travers1e Longitudinal, cross, Vertical	2100mm/min;ç700 mm/min	2100mm/min;ç700mm/min
Main drive motor milling head spindle	3kw ;ç1440rpm	3kw(1440rpm)
Main drive motor Level spindle	4kw ;ç1440rpm	4kw 1440rpm
Feed motor	0.75kw ;ç1380rpm	0.75kw 1380rpm
Coolant pump	40w ;ç2500rpm	40w 2500rpm
Net weight of machine	2650kg	2650kg
Gross weight of machine	3450kg	3450kg

Overall Dimensions (L;ÁW;ÁH)	1695;Á1535;Á1728mm	1695;Á1535;Á1728(mm)
ii	ii	ii