


POLYTOP

Exporter from china

PTB3194 BENCH LATHE

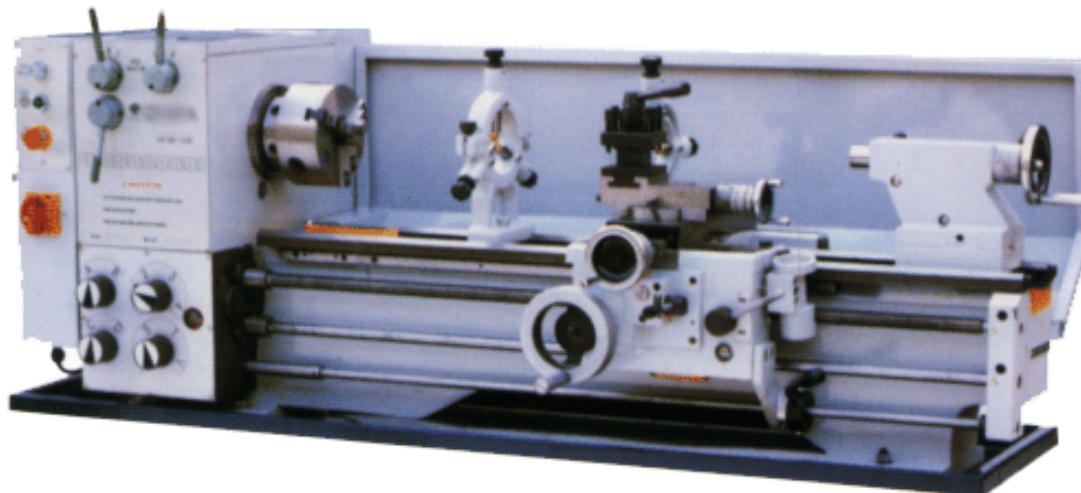

MODEL		PTB3194		
MAIN DATA	Swing over bed	305mm		
	Distance between centers	940mm		
	Swing over gap	440mm		
	Swing over carriage	173mm		
SPINDLE ii	Spindle hole	38mm		
	Taper of spindle	M.T.5		
	Step of speed	9 kinds		
	Range of speed	64~1500r.p.m.(50Hz)/(60Hz)		
FEED SYSTEM	Thread of lead screw	8 T.P.I.		
	Inch thread can open	4-56T.P.I.		
	Metric thread can open	0.4-7.0mm		
	Range of feed amount	0.052-1.392mm/r(32 kings)		
SADDLE AND CARRIAGE ii	Saddle travel	810mm		
	Cross travel	150mm(5-29/32jǎ)		
	Compound travel	90mm(3-6/11")		
TAIL STOCK	Barrel travel	100mm		
	Taper of center	M.T.3		
MOTOR	Voltage/Frequency	As customer's requirement		
	Power	1.1Kw(1.5HP)		
SHIPMENT DATA ii	Packing size	Machine	1780 x 740 x 750mm	
		Stand	Large	415 x 360 x 680mm
			Small	290 x 360 x 680mm
	N. weight/G. weight (machine)		390kg/440kg	

	N. weight/G. weight (stand)	60kg/65kg
	Loading amount	24pcs/20'container
	ii	ii