


POLYTOP

Exporter from china

PTB4280 PRECISION BENCH LATHE

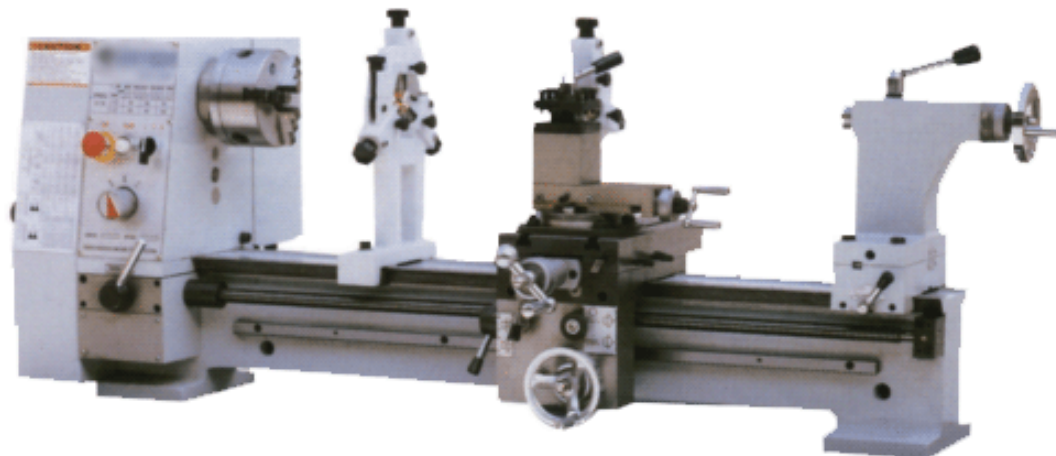

MODEL		PTB4280	PTB4250
MAIN DATA	Swing over bed	420mm	420mm
	Distance between centers	800mm	500mm
	Max. longitudinal travel	740mm	440mm
	Max. cross travel	120mm	120mm
SPINDLE	Taper of spindle	M.T.4	M.T.4
	Spindle hole	28mm	28mm
	Step of speed	6	6
	Range of speed	150j«1250r.p.m.	150j«1250r.p.m.
TAILSTOCK	Barrel travel	70mm	70mm
	Taper of center	M.T.3	M.T.3
FEED SYSTEM	Metric thread range	0.75-6mm	0.75-6mm
	Inch thread range	4~120T.P.I.	4~120T.P.I.
	Range of longitudinal automatic feeding	0.05-0.35mm (0.002-0.014jâ)	0.05-0.35mm (0.002-0.014jâ)
	Range of cross automatic feeding	0.05-0.35mm (0.002-0.014jâ)	0.05-0.35mm (0.002-0.014jâ)
MOTOR	Motor Power	0.55Kw	0.55Kw
	Voltage/Frequency	As customer's requirement	
	Motor power	1440r.p.m.	1440r.p.m.
SHIPMENT DATA	Overall size	1457 x 600 x 497mm	1157 x 600 x 497mm
	Packing size	1430 x 570 x 690mm	1130 x 570 x 690mm
	Net weight	190Kg	175Kg
	Gross weight	230Kg	210Kg
	Loading amount	48pcs/20'container	60pcs/20'container