


POLYTOP

Exporter from china

PTHQ500/800 MULTI-PURPOSE MACHINE

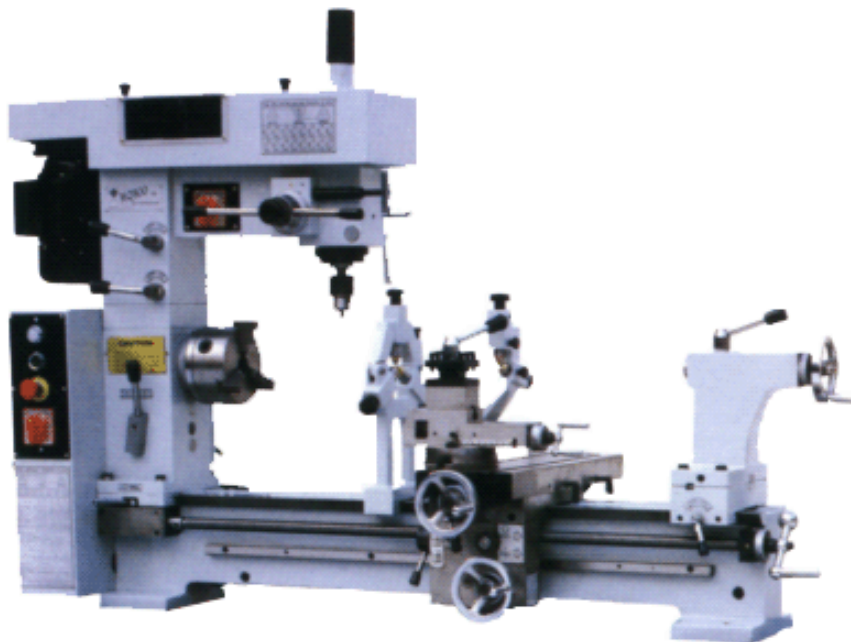

MODEL		PTHQ500 (PTHQ800)
TURNING	Swing over bed	420mm
	Distance between centers	500mm (CNCPTHQ800:800mm)
	Max. longitudinal travel	440mm (CNCPTHQ800:740)
	Max. cross travel	200mm (CNCHQ800:200mm)
	Taper of spindle	M.T.4
	Spindle hole	∅28mm
	Step of speed / Range of speed	7 / 160-1360r.p.m.
	Barrel travel	70mm
	Taper of center	M.T.3
	Metric thread can be cut	0.2-6mm
	Inch thread can be cut	4-120T.P.I.
	Longitudinal range of automatic feeding	0.05-0.35mm (0.002-0.014jǎ)
	Cross range of automatic feeding	0.05-0.35mm (0.002-0.014jǎ)
DRILLING & MILLING	Drilling capacity	∅22mm
	Table size (L x W)	475x160mm ²
	End mill capacity	∅28mm
	Face mill capacity	∅80mm
	Max. distance between spindle center and column	285mm
	Max. distance between spindle nose and table	306mm
	Spindle travel	110mm
Spindle taper	M.T.3	

	Steps of spindle speed / Range of spindle speed	16 / 120-3000r.p.m.
	Swiveling angle of headstock	±180°
MOTOR	Main motor power / Drilling and milling motor	0.55Kw / 0.55Kw
	Voltage/Frequency	As customer's requirement
	Motor speed	1400r.p.m.
SHIPMENT DATA	Overall size	1460 x 580 x 965mm (PTHQ800:1760x580x965mm)
	Packing size	1130 x 580 x 1100mm (PTHQ800:1430x580x1100mm)
	Net weight/Gross weight	245kg/280kg (275kg/325kg)
	Loading amount	40pcs/20'container (PTHQ800:26pcs/20'container)
		ii