


POLYTOP

Exporter from china

PTZC1500 UNIVERSAL LATHE

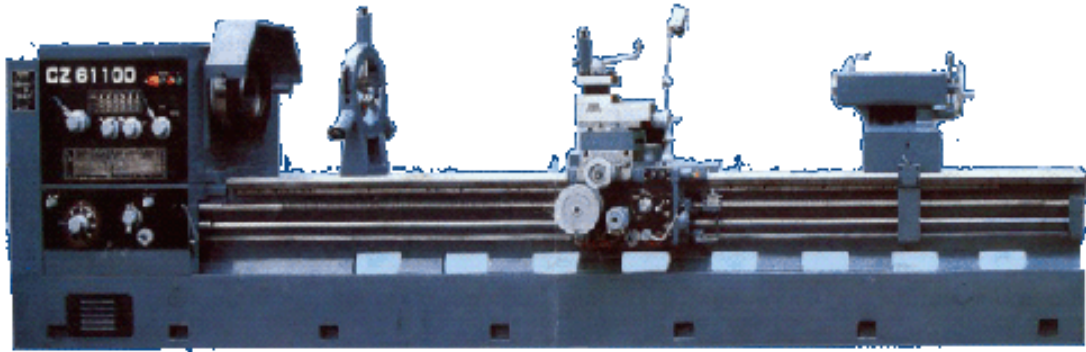

ii

Specifications		PTZC1500	PTZC2500	PTZC1600	PTZC2600
CAPACITIES	Max. swing over bed	1000 mm	1000 mm	1200 mm	1200 mm
	Max. swing over cross slide	600 mm	600 mm	600 mm	600 mm
	Center distance	1500;2000;3000;4000;5000;6000 mm			
	Max. swing over gap	ii	1200 mm	ii	1400 mm
	Valid length of gap	300 mm			
	Bed with	500 mm			
HEADSTOCK	Spindle hole	105 mm			
	Spindle nose	C-11 or D-11			
	Spindle taper	MT#100			
	Spindle speeds (Number)	14-750 RPM or 18-900RPM (18 STEPS)			
GEAR BOX- THREADS & FEEDS	Metric threads range (Kinds)	1-240 mm (54 Kinds)			
	Inch threads range (Kinds)	28-1 inch (37 Kinds)			
	Module threads range (Kinds)	0.5-60 OP (45 Kinds)			
	Diametral threads range (Kinds)	30-1 t.p.i. (27 Kinds)			
	Longitudinal feeds range (Kinds)	0.05-1.42 mm/r (72 Kinds)			
	Cross feeds range (Kinds)	0.015-0.48 mm/r (72 Kinds)			
	Rapid feed: Long/Cross	6/2 m/min			
	Leadscrew size: Diameter/Pitch	T48 mm /12 mm			
CARRIAGE	Cross slide travel	400 mm			
	Compound rest travel	230 mm			
	Size of tool shank	30;Á30 mm			
TAILSTOCK	Spindle diameter	120 mm			
	Spindle taper	MORSE #6			
	Spindle travel	205 mm			

MOTOR	Main drive motor		11 kw	
	Coolant pump motor		0.09 kw	
	Rapid feed motor		0.18 kw	
NET WEIGHT FLOOR SPACE (L _i ÁW _j ÁH)	Center distance	1500 mm	4500 kg	3542 _j Á1276 _j Á1390 mm
		2000 mm	5000 kg	3592 _j Á1276 _j Á1390 mm
		3000 mm	5500 kg	4952 _j Á1276 _j Á1390 mm
		4000 mm	6000 kg	5952 _j Á1276 _j Á1390mm