


PTBS712 METAL CUTTING BAND SAW

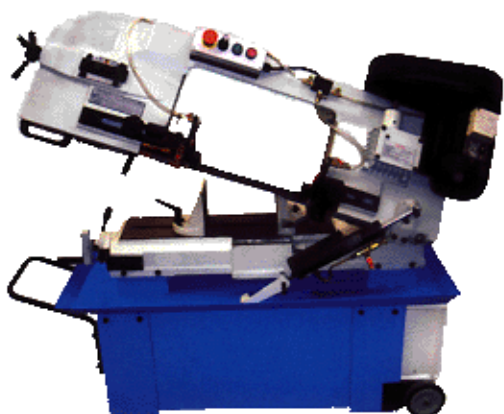

ii

- PTBS712 The bow can be swiveled between 90° and 45°
- PTBS712GDR The bow can be swiveled between 45°

ii

ii

Model		PTBS712	PTBS712R	PTBS712GDR
Max. Capacity	Circular @90°	229mm(9")	229mm(9")	229mm(9")
	Rectangular @90°	178;Á305mm(7";Á12")	178;Á305mm(7";Á12")	178;Á305mm(7";Á12")
	Circular @45°	150mm(6")	150mm(6")	150mm(6")
	Rectangular @45°	127;Á150mm(5";Á6")	127;Á150mm(5";Á6")	127;Á150mm(5";Á6")
Blade speed	@60HZ	32,60,88,115MPM 105,196,288,377FPM	32,78,115MPM 125,255,380FPM	38,78,115MPM 125,255,380FPM

ii

ii

	@50HZ	26,50,73,95MPM 85,164,240,312FPM	31,65,95MPM 104,212,316FPM	31,65,95MPM 104,212,316FPM
Blade size		27;Á0.9;Á2655mm(1.06";Á0.036";Á104.5")	27;Á0.9;Á2655mm(1.06";Á0.036";Á104.5")	27;Á0.9;Á2655mm(1.06";Á0.036";Á104.5")
Motor		735W(1HP), 50/60HZ	735W(1HP), 50/60HZ	735W(1HP), 50/60HZ
Drive		V-Belt	Gearbox	Gearbox
Packing size		1600;Á600;Á1150mm(63";Á23.5";Á45")	1600;Á600;Á1150mm(63";Á23.5";Á45")	1600;Á600;Á1150mm(63";Á23.5";Á45")
N.W./ G. W.		200/248 kg (440/546lbS.)	210/260 kg (462/572lbS.)	220/270 kg (485/590lbS.)
ii		ii	ii	ii