


POLYTOP

Exporter from china

PTWC67Y-SERIES HYDRAULIC PRESS BRAKE:

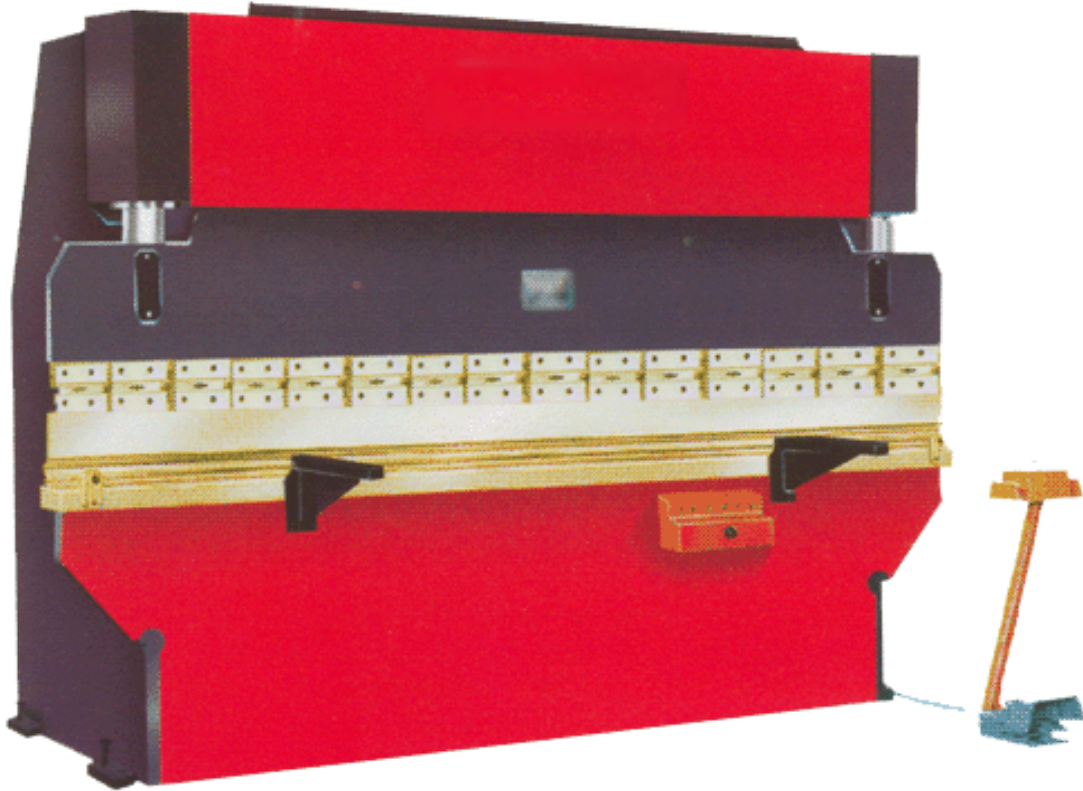

Functions and Characteristics:

This machine is transmitted with incliner. The machine is of steadiness, safety and reliableness while being used. The feature of it is that the mechanical gear of controlling the upper sliding block strode and the equipment of the back gauge are all mechanical driving. And there is installation of a manually operated timing and counter. The precision adjustment mechanism of the slanting wedge is equipped at the top of the upper die to as sure the precision of the production. This kind of machine accords with the advanced standard of Germany DIM. It is widely used in all kinds of bending of plate industry, such as, the industry of automobile, airplane, ship, post and telecommunication, family used electrical equipment, instrument and meter.

Main specifications for PTWC67Y-series Hydraulic press brake

Type	Nominal force (KN)	Length of worktable (mm)	Distance between vertical columns (mm)	Throat depth (mm)	Travel of ram (mm)	Max opening height (mm) ii	Adjusting range of ram (mm)	Motor power (kw)	Net weight (kg)	Size (mm)
WC67Y-40/2000	400	2000	1700	200	100	340	75	4	3500	2080*1552*1900
WC67Y-40/2200	400	2200	1800	200	100	340	75	4	3950	2280*1552*1900
WC67Y-40/2500	400	2500	2100	200	100	340	75	4	4200	2580*1552*1900
WC67Y-50/2500	500	2500	2100	250	100	360	60	4	4100	2700*1880*2160
WC67Y-50/3200	500	3200	2600	250	100	360	60	4	4650	3360*1880*2160
WC67Y-63/2500	630	2500	2100	250	100	380	80	5.5	4650	2580*1685*2190
WC67Y-63/3200	630	3200	2600	250	100	380	80	5.5	5800	3080*1685*2190
WC67Y-80/3200	800	3200	2600	250	100	350	80	7.5	6400	3280*1765*2240
WC67Y-80/4000	800	4000	3300	250	100	350	80	7.5	8000	4080*1765*2400
WC67Y-100/2500	1000	2500	2100	320	150	450	120	7.5	7300	2590*1770*2300
WC67Y-100/3200	1000	3200	2600	320	150	450	120	7.5	8000	3290*1770*2450
WC67Y-100/4000	1000	4000	3300	320	150	450	120	7.5	9800	4100*1800*2450
WC67Y-100/5000	1000	5000	4000	320	150	450	120	7.5	13500	5100*1800*2890
WC67Y-125/2500	1250	2500	2100	320	150	450	120	11	7800	2590*1770*2300
WC67Y-125/3200	1250	3200	2600	320	150	450	120	11	8600	3290*1940*2450
WC67Y-125/4000	1250	4000	3000	320	150	450	120	11	13500	4100*1940*2900
WC67Y-125/5000	1250	5000	4000	320	150	450	120	11	15500	5100*1940*3200
WC67Y-160/3200	1600	3200	2600	320	200	500	160	11	10600	3280*1940*2450
WC67Y-160/4000	1600	4000	3300	320	200	500	160	11	12300	4080*1940*2650
WC67Y-160/5000	1600	5000	4000	320	200	500	160	15	17000	5100*1940*3200
WC67Y-160/6000	1600	6000	5000	320	200	500	160	15	19500	6100*2200*3300
WC67Y-200/3200	2000	3200	2600	320	200	500	160	15	13000	3300*1940*2950
WC67Y-200/4000	2000	4000	3300	320	200	500	160	15	15000	4080*1940*3200
WC67Y-200/5000	2000	5000	4000	320	200	500	160	15	21500	5100*2200*3300
WC67Y-200/6000	2000	6000	5000	320	200	500	160	15	24000	6100*2200*3300
WC67Y-250/3200	2500	3200	2600	400	250	600	200	18.5	16000	3300*1940*2950
WC67Y-250/4000	2500	4000	3300	400	250	600	200	18.5	20500	4080*1940*3300
WC67Y-250/5000	2500	5000	4000	400	250	600	200	18.5	24000	5100*2200*3800
WC67Y-300/4000	3000	4000	3300	400	250	600	200	22	30000	4100*2300*3800
WC67Y-300/5000	3000	5000	4000	400	250	600	200	22	34000	5100*2300*4350
WC67Y-300/6000	3000	6000	5000	400	250	600	200	22	40000	6100*2300*4750
ii	ii	ii	ii	ii	ii	ii	ii	ii	ii	ii