


# POLYTOP

Exporter from china

---

## **PTF58125 VER./HOR. DIVIDING HEAD:**

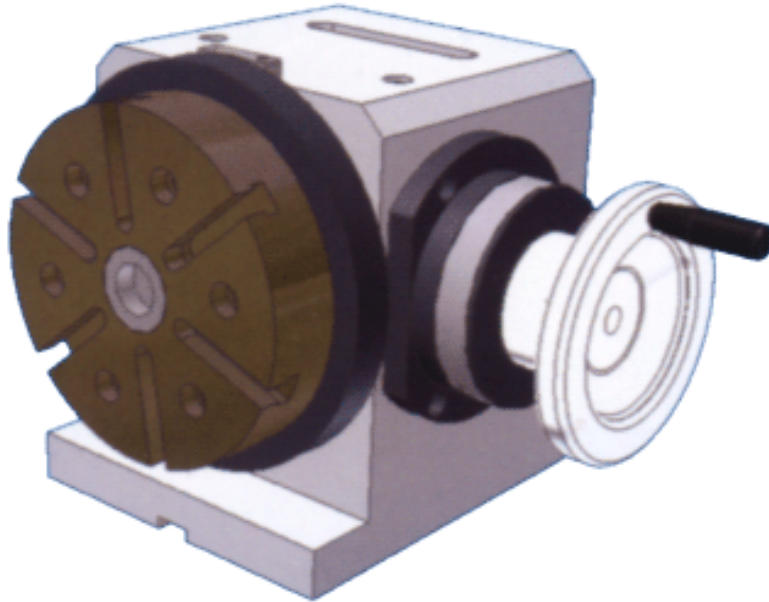

### **Features:**

PTF58125 manually operated indexer, which can be mounted either vertically or horizontally, is mainly used on milling and boring machines. With non-lifting Hirth coupling indexing, it features high accuracy and perfect rigidity.

<b>Specifications</b>	<b>PTF58125</b>	<b>PTF58160</b>
Center height	125 mm	101.6 mm
Equal divisions	2.3.4.6.8.12.24	
Table diameter	§¶160 mm	
Thickness with table horizontal	210 mm	
Taper of spindle bore	MT3	
Width of locating key.	18 mm	
Width of "T" slot.	10 mm	
Indexing accuracy	30"	
Load capacity of Hor. Spindle	50 kg	
Net weight	49 kg	ii
Gross weight	60 kg	ii
Case dimensions	580jÁ385jÁ353 mm	ii
ii	ii	ii