


POLYTOP

Exporter from china

PTWZ TAILSTOCK:

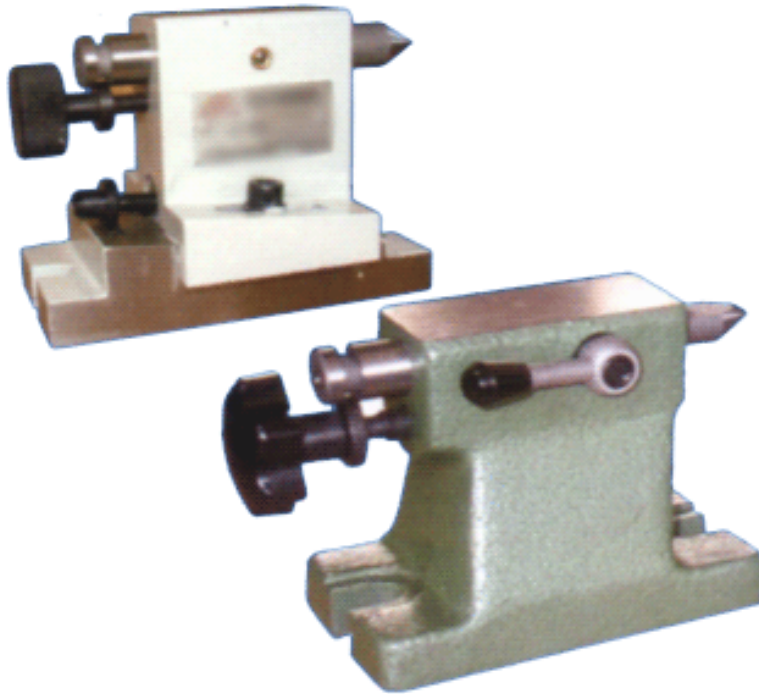

Features:

PTWZ70, PTTSL160-2, PTTSL400-2 is designed for use with the vertical rotary tables. The tailstock is used to hold and center shaft, cylinders and other workpieces for the machining of grooves, splines, flats, keyways, etc. The center is retractable for repeated operations. Center is securely locked into position with clamp.

Note: Type PTWZ70 tailstock is matched to PTTSL100. Type PTTSL160-2 tailstock is matched to PTTSL160. PTTSL400-2 tailstock is matched to PTTSL400. The tailstock for rotary table is special supplied.

Specifications	PTWZ70	PTTSL160-2	PTTSL400-2
Distance between taper center to base	70 mm	125 mm	260 mm
Taper of center	-	MT2	MT3
Width of locating key	10 mm	12 mm	18 mm
Stroke of center	12 mm	30 mm	
Net weight	2.5 kg	9 kg	28 kg
Gross weight	3 kg	12 kg	32 kg
Case dimensions mm	200;Á120;Á202	320;Á160;Á218	375;Á355;Á260
ii	ii	ii	ii